



# **HERZ Thermostat** Chrono Battery Zusatz Zusatz

Data sheet for **7795 02**, Issue 0715

## Description

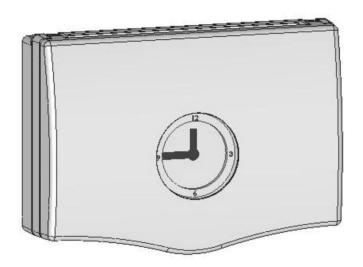

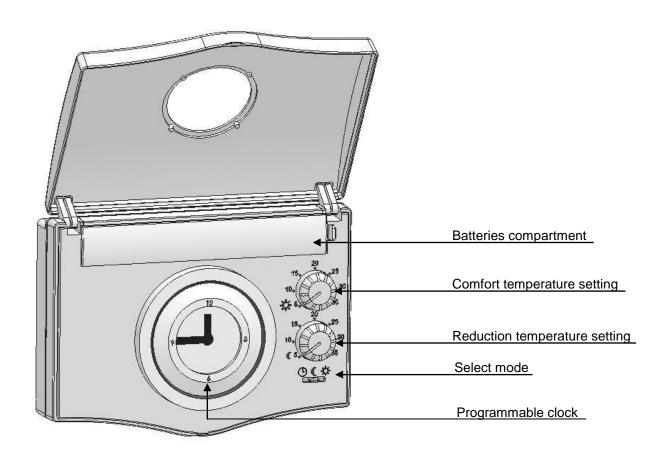



Output

#### Technical Data

Operation temperature
Setting temperature range
Daily clock programmable
Weekly clock programable
Regulation characteristics
Electrical Protection
Power Supply
Battery operated life

0°C - 50°C (or 32°F - 122°F) 5°C - 35°C (or 41°F - 95°F) 24h with 15 minutes step 7 days with 1 hour step

Proportional band 2°K for 10min cycle

Class II - IP30 2 x AA LR06 1.5V

over one year (for Alkaline type)

Relay output → 1RT Free contact (5(3)A 250Vac )

## Programmable clockDaily programmable clock



### Weekly programmable clock



### Modes Description

Electronic thermostat with mechanical clock

Possibility to set day and night temperature.

Daily or Weekly program.

3 positions switch:

Clock Reduction Mode Comfort

Relay Output (free contact)



## Select mode Clock mode



The system follows the temperature set by the system follows, according to the program clock.

#### **Reduction mode**



The system follows the temperature set by the knobs.

#### Comfort mode



The system follows the temperature set by the 🗱 knobs.

All specifications and statements within this document are according to information available at the time of printing and meant for informational purpose only. Herz Armaturen reserves the right to modify and change products as well as its technical specifications and/or it functioning according to technological progress and requirements. It is understood that all images of Herz products are symbolic representations and therefore may visually differ from the actual product. Colours may differ due to printing technology used. In case of any further questions don't hesitate to contact your closest HERZ Branch-office.