

# HERZ-3000 Connections for two-pipe systems



- Reliable connection, easy installation
- Available in straight and angled versions
- Compact design with 50 mm centre distance
- Quick installation thanks to rotatable nut
- Fits standard pipe connections (¾")
- Compression sets available separately

## **HERZ-3000 - Connection system for valve radiators**


## ☑ Freely rotating nut on the radiator side, external G 3/4" thread on the pipe side for compression set






### ☑ Two-pipe connection set (Straight / Angle)

- Pipe centre spacing 50 mm
- Radiator connection G 3/4" with freely-rotating nut
- Pipe connection with male thread G ¾" with cone for compression adapter connection
- Compression adapters must be ordered separately



### ☑ Two-pipe connection set with connection nipples

- Pipe centre spacing 50 mm
- Radiator connection G ½" with freely-rotating nut
- 2 connection nipples 1 3002 31 are enclosed
- Pipe connection with male thread G ¾" with cone for compression adapter connection
- Compression adapters must be ordered separately

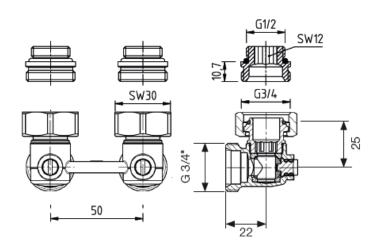

Straight model		Angle model	
1 <b>3766</b> 31	Radiator connection G ¾" with cone	1 <b>3766</b> 51	Radiator connection G ¾" with cone
1 <b>3766</b> 32	Radiator connection G ½" 2 connection nipples 1 <b>3002</b> 31 included	1 <b>3766</b> 52	Radiator connection G ½" 2 connection nipples (1 <b>3002</b> 31) included

E-mail: office@herz.eu