

Water filter for drinking water installations

Safe is safe





Overview

Clean, hygienically safe drinking water is one of the most valuable resources of our time. Laws, ordinances and regulations define the detailed framework to protect the "blue gold" from harmful influences. Despite the very good drinking water quality in many places - especially from large central systems - from a technical point of view filtering, ideally immediately after the house connection or the water meter, makes sense: On the way from the waterworks through the widely ramified distribution network, loose deposits (dirt particles) are included. These undissolved substances are then deposited in the house pipes and are the main cause of corrosion and malfunctions in (fine) fittings, household and water heating devices (e.g. boilers, flow heater), garden irrigation systems, etc. **The solution:** HERZ water filters for drinking water installations.

☑ Filter for cold water

Rinsable drinking water filter, brass housing, transparent PA12 cup, stainless steel filter (80-100 μ m), max. operating temperature 40 °C, max. operating pressure 16 bar, including connection bush and filter key, with manometer connection F ¼", manometer 0-10 bar (1 **2682** 34) must be ordered separately, with thread G ¾" for hose connection (e.g. 1 **6206** 02, to be ordered separately).


► HERZ Filter for cold water	DN	Order number
	15	2 3010 01
	20	2 3010 02
	25	2 3010 03

Rinsable drinking water filter, brass housing, cup made of glass-fibre reinforced, transparent plastic, stainless steel filter (100 µm), max. operating temperature 30 °C, max. operating pressure 16 bar, including end connections and filter key.

■ HERZ Filter for cold water	DN	Order number
	15	l 0553 01
	20	l 0553 02
	25	l 0553 03




Application examples

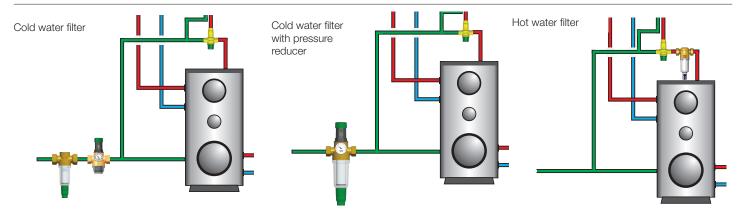

Filter for cold water with pressure reducer

Rinsable drinking water filter, brass housing, transparent PA12 cup, stainless steel filter (80-100 μ m), incl. connection holder and filter key, with G ¾" thread for hose connection (e.g. 1 **6206** 02, to be ordered separately), Pressure reducer according to EN 1567, setting range 1.5 - 6 bar, incl. manometer 0-10 bar, max. operating temperature 40 °C, max. inlet pressure 16 bar.

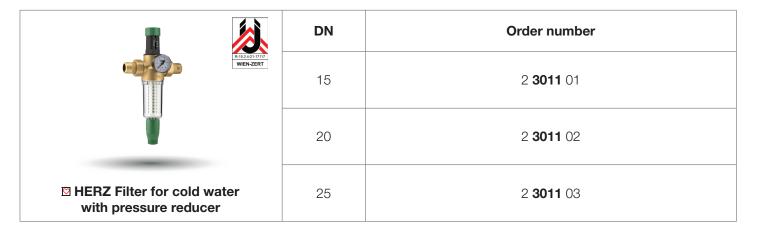

☑ Filter for hot water

Rinseable drinking water filter, brass housing, cup made of Trogamid plastic, stainless steel filter (mesh size 100 µm), max. operating temperature 60 °C, max. operating pressure 16 bar, including end connections and filter key.

CONST.	DN	Order number
	15	l 0554 01
	20	l 0554 02
☑ HERZ Filter for hot water	25	l 0554 03




Accesories		DN	Order number
	Replacement filter for HERZ filters for cold water DN 15 - DN 25 (2 3010 01, 2 3010 02, 2 3010 03) and for HERZ filters for cold water with pressure reducer DN 15 - DN 25 (2 3011 01, 2 3011 02, 2 3011 03)		2 6301 00
	Replacement filter cup with drain valve for HERZ filters for cold water DN 15 - DN 25 (2 3010 01, 2 3010 02, 2 3010 03) and for HERZ filters for cold water with pressure reducer DN 15 - DN 25 (2 3011 01, 2 3011 02, 2 3011 03)		2 6301 01
0	Filter key for HERZ filters for cold water DN 15 - DN 25 (2 3010 01, 2 3010 02, 2 3010 03) and for HERZ filters for cold water with pressure reducer DN 15 - DN 25 (2 3011 01, 2 3011 02, 2 3011 03)		1 2682 27
SHerz 10	Manometer for HERZ filters for cold water DN 15 - DN 25 (2 3010 01, 2 3010 02, 2 3010 03) and for HERZ filters for cold water with pressure reducer DN 15 - DN 25 (2 3011 01, 2 3011 02, 2 3011 03)		1 2682 34
	Hose connection for HERZ filters for cold water DN 15 - DN 25 (2 3010 01, 2 3010 02, 2 3010 03) and for HERZ filters for cold water with pressure reducer DN15 - DN25 (2 3011 01, 2 3011 02, 2 3011 03)	DN 10	1 6206 00
		DN 15	1 6206 01
		DN 20	1 6206 02
	Replacement filter for HERZ filters for cold water DN 15 - DN 25 (I 0553 01, I 0553 02, I 0553 03) and for HERZ filter for hot water DN 15 - DN 25 (I 0554 01, I 0554 02, I 0554 03) 30 µm stainless steel cartridge		l 0554 08
	Replacement filter for HERZ filters for cold water DN 15 - DN 25 (I 0553 01, I 0553 02, I 0553 03) and for HERZ filter for hot water DN 15 - DN 25 (I 0554 01, I 0554 02, I 0554 03) 100 μm stainless steel cartridge		l 0554 09

► HERZ Armaturen GesmbH - Wien



in Herz Armaturen Ges.m.b.H.





Herz Armaturen Ges.m.b.H.



HERZ Armaturen Ges.m.b.H.

Richard-Strauss-Straße 22, 1230 Vienna, Austria T: +43 1 616 26 31-0, F: +43 1 616 26 31-227 E-Mail: office@herz.eu





