

Ball Valves

for gas, water, heating, air-conditioning,
ventilation and sanitation systems



New generation of ball valves

The Austrian company HERZ Armaturen GmbH has for many years been producing ball valves for diverse applications in housing technology and industry. HERZ ball valves are manufactured on state-of-the-art production machines with precision and care in the heart of Europe for sales with strong partners to the whole world.



The new generation of ball valves is compact, light-weight and presents a comprehensive range of products for pipe installations.


The new construction design of ball valves comprise numerous improvements, which increase the quality of our products even further and enable a simple and quick assembly.

HERZ ball valves are not only suitable for use in heating, cooling and sanitary installations, but also for drinking water plants with regional standards requiring special materials and product construction, in order to be able

to fulfil the highest European standards. They are suitable for all non-aggressive media, such as water, oil, crude oil, heating oil, compressed air, etc.).

FULL BORE BALL VALVES

HERZ ball valves do not require excessive circulating pump pressures, as they are always provided with maximum valve bore = full bore.

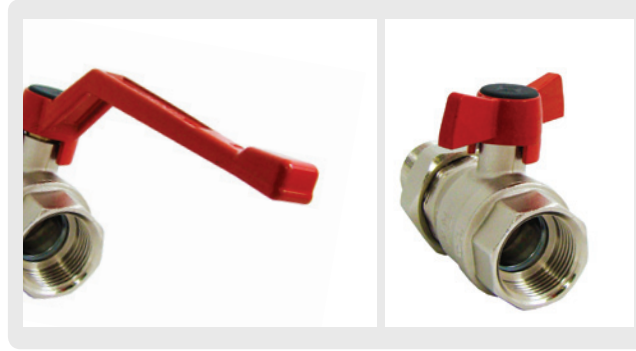


Spindle sealing: PTFE - teflon

Ball sealing: PTFE - teflon

Valve body: brass, manufactured in accordance with EN 12420, nickel-plated




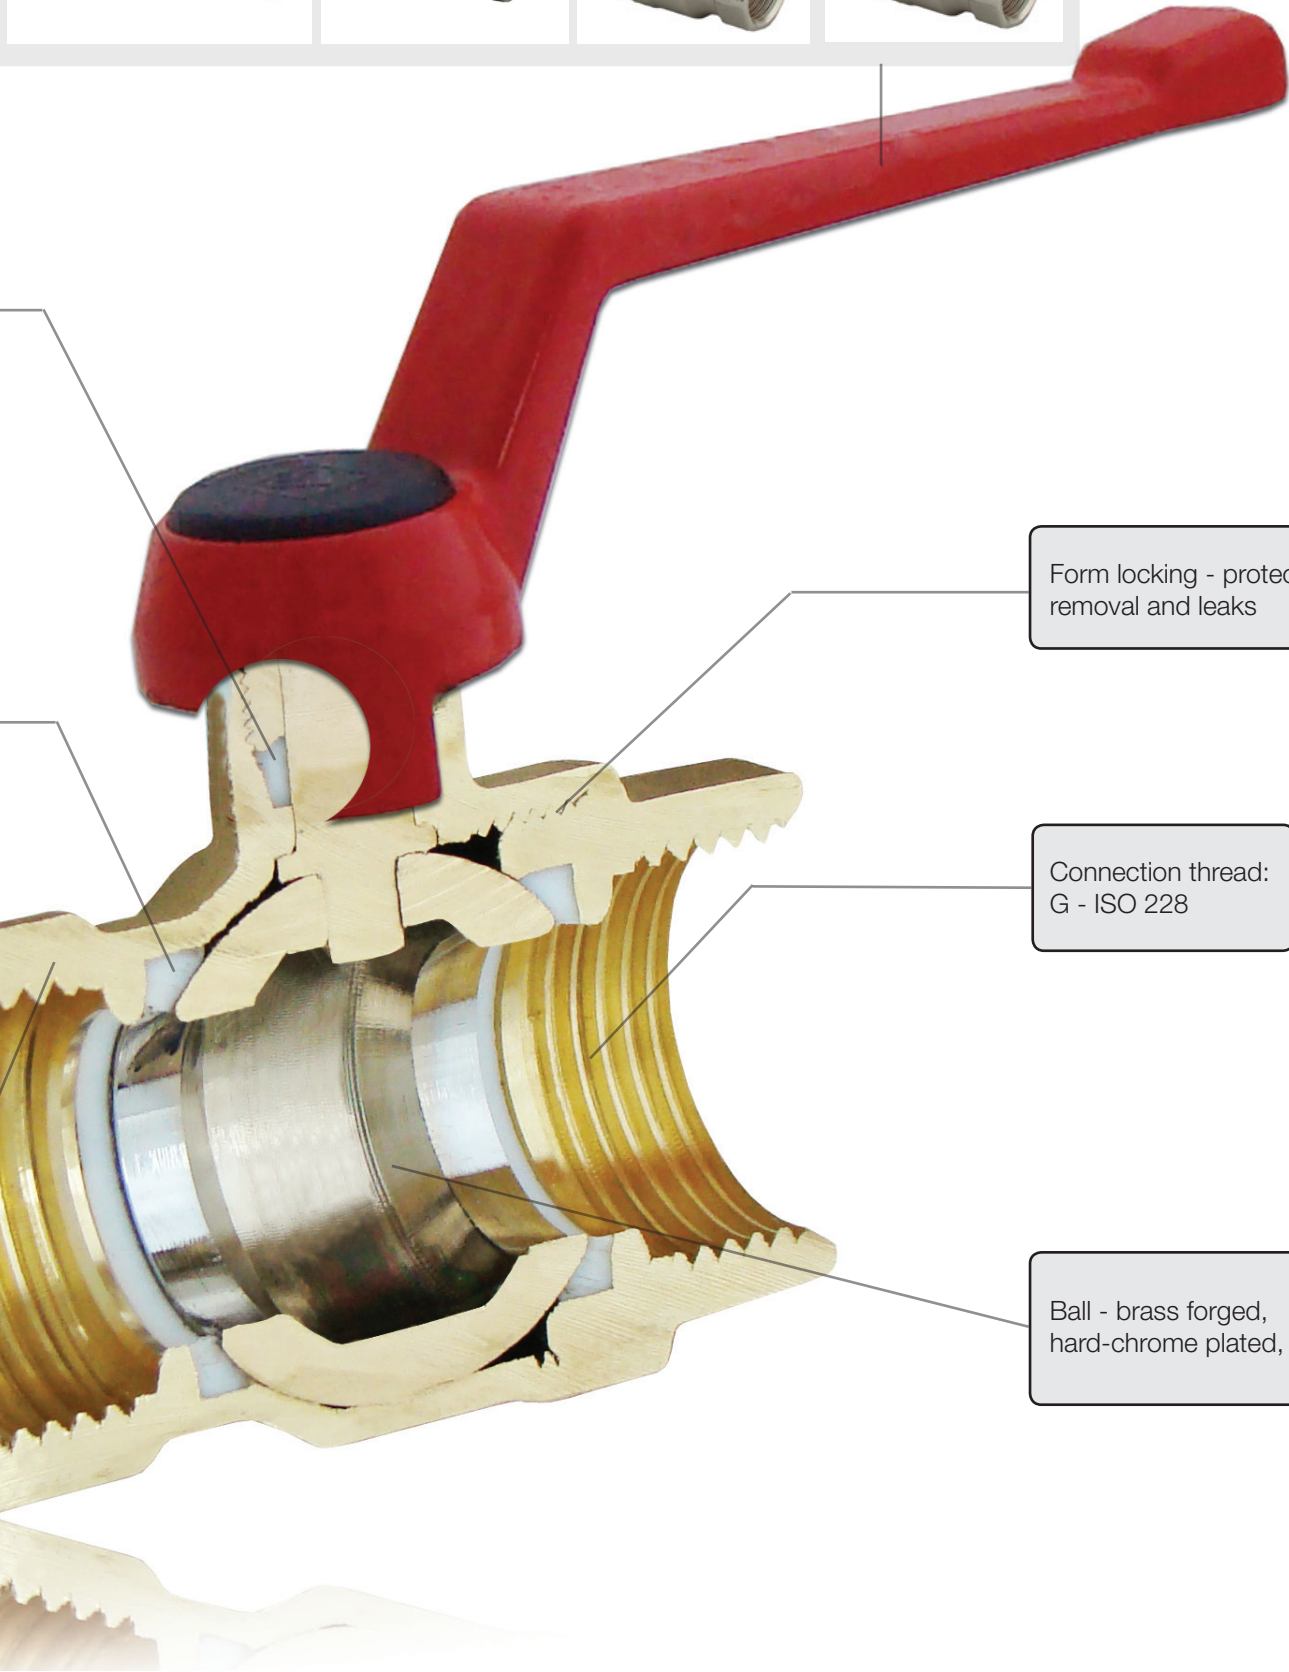


Form locking - protection against removal and leaks

Connection thread:
G - ISO 228


Ball - brass forged,
hard-chrome plated, hollow

TECHNICAL DATA

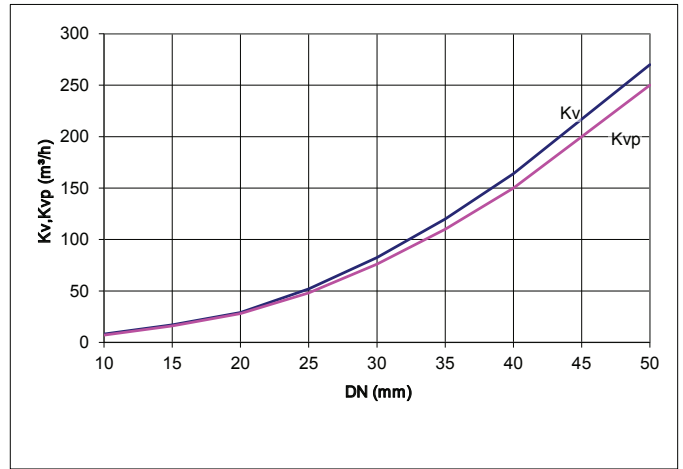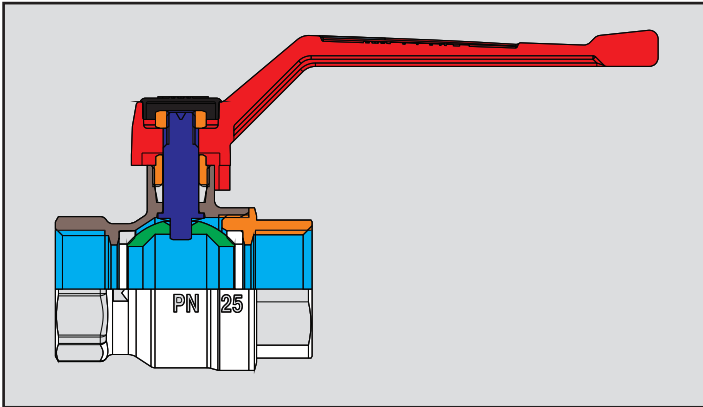

TECHNICAL DATA:


- Dimensions: DN8 - DN80
- Connection thread
ISO 228
ISO 7 / 1
- Full flow
- Operating pressure PN 25
- Operating temperature
30°C - 120°C (water: 0.5°C - 110°C - except for steam)
- Medium: water, compressed air, mineral oil, crude oil and all non-aggressive media

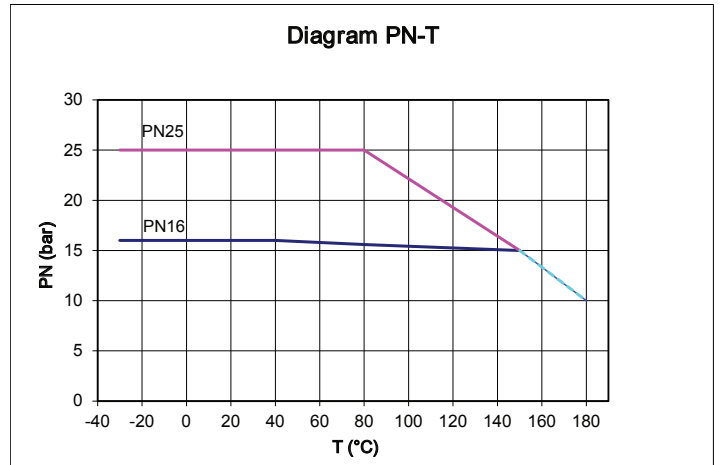


DN	15	20	25	32	40	50
Kv	17	34	55	102	165	270
Kvp	15,8	31,5	51	95	153	250

Kv: Rate of flow unit (m³/h) - water at 15.5°C, pressure drop 1 bar (100kPa) when valve fully opened.

Kvp: Rate of flow unit (m³/h) - density of air 1.15 kg/m³ at 15.4°C, 1 mbar pressure loss (0.1 kPa) when valve fully opened.

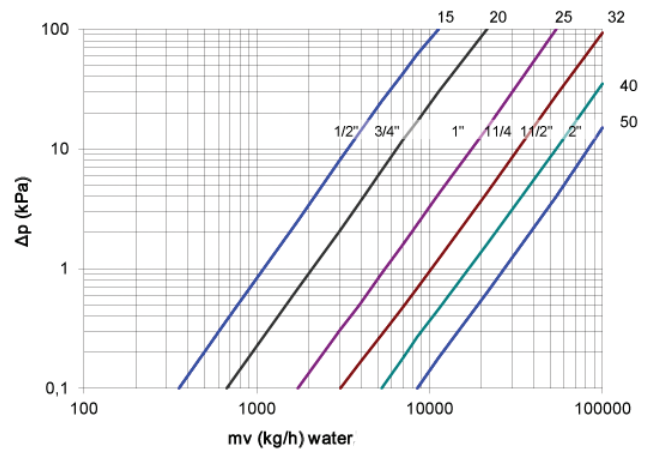

Of course, we don't just make "one" ball valve. Herz have developed different versions and models to suit a diverse range of applications for our customers. Whether for technical gases, such as nitrogen or natural gas, coolant or drinking water, HERZ can offer not only a product complying with the relevant standards but also non-conforming products for practically every medium.

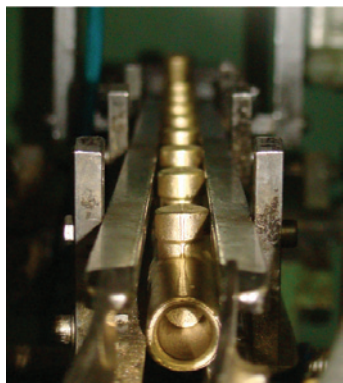

HERZ BALL VALVE MODEL **2201**: models DN 15 (1/2") to DN 50 (2"), pressure class 25 bar; water, oil, recommended for heating systems. Handles in lever or wing shape, connections on both sides, internal thread in accordance with ISO 7, brass body nickel-plated, colour of handle red.



HERZ BALL VALVE MODEL **2211**: models DN 15 (1/2") to DN 50 (2"), pressure class 25 bar; water, oil, recommended for heating systems. Handles in lever or wing shape, connections on both sides, internal thread in accordance with ISO 7, brass body nickel-plated, colour of handle red.



HERZ BALL VALVE MODEL **2201**: models DN 15 (1/2") to DN 50 (2"), pressure class 25 bar; water, oil, recommended for heating systems. Tee shaped handles, connections on both sides, internal thread in accordance with ISO 7, brass body nickel-plated, colour of handle black. Cover in red or blue, some models with thermometer.



HERZ BALL VALVE MODEL **2206**: models DN 15 (1/2") to DN 50 (2"), pressure class PN 25 bar; water, recommended for sanitary installations. Handles in lever or wing shape, connections on both sides, internal thread in accordance with ISO 7, brass body made from dezincification resistant brass, bright, colour of handle red.




HERZ BALL VALVE MODEL **2216**: models DN 15 (1/2") to DN 50 (2"), pressure class PN 25 bar; water, recommended for sanitary installations. Handles in lever or wing shape, connections on both sides, internal-external thread in accordance with ISO 7, brass body made from dezincification resistant brass, bright, colour of handle red.



HERZ BALL VALVE MODEL **2206**: models DN 15 (1/2") to DN 50 (2"), pressure class PN 25 bar; water, recommended for sanitary installations. Tee shaped handles, connections on both sides, internal thread in accordance with ISO 7, brass body made from dezincification resistant brass, bright, colour of handle black. Cover in red or blue, some models with thermometer.



HERZ BALL VALVE MODEL **2100**: models DN 8 (1/4") to DN 80 (3"), pressure classes from 16 to 63 bar according to dimensions; water, oil, recommended for heating systems. Handles in lever or wing shape, connections on both sides, internal thread or internal-external thread in accordance with ISO 7, brass body nickel-plated, colour of handle red.

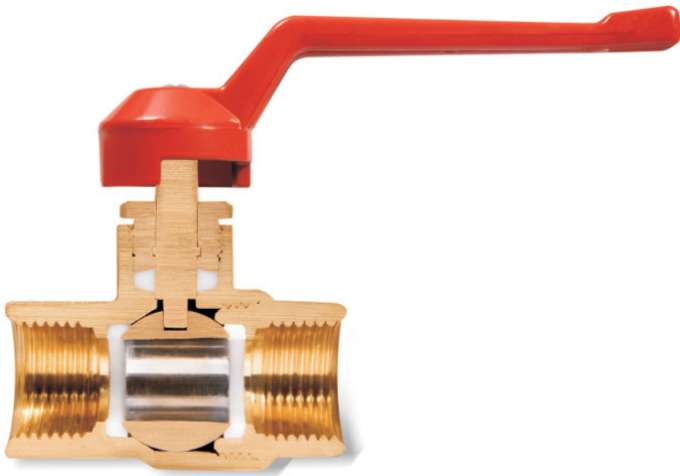

VARIANT WITH DRAINING (**2402**): models DN 15 (1/2") to DN 40 (1 1/2"), pressure classes from 25 to 40 bar according to dimensions; water, recommended for heating systems. Handles in lever or wing shape, connections on both sides, internal thread in accordance with ISO 7, brass body nickel-plated, colour of handle red.




MODEL VARIANT PIPEFIX WITH PRESS CONNECTION (P72) for pipe dimensions 16 x 2.0, 18 x 2.0, 20 x 2.0, 26 x 3.0, PN 10, water, heating and cooling systems, special bright brass, colour of handle red.



MODEL VARIANT PIPEFIX WITH PRESS CONNECTION FOR FLUSH MOUNTING (P72) for pipe dimensions 16 x 2.0, 20 x 2.0, 26 x 3.0, PN 10, water and sanitary installations, special bright brass.



HERZ BALL VALVE MODEL **2100 W**: models DN 15 (1/2") to DN 50 (2"), pressure class PN 16 bar; water, recommended for sanitary installations, straight-through body with water flushed ball free of dead space to avoid the growth of legionella in compliance with German Specialist Association for Gas and Water (DVGW) guideline. Handle in lever or wing shape, connections on both sides, internal thread in accordance with ISO 7, brass body made from dezincification resistant special brass, bright, colour of handle green.

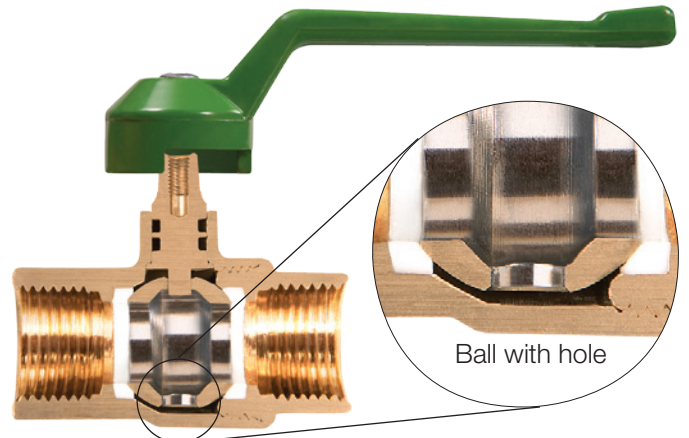


MULTIFUNCTION BALL VALVE: DN 20 (3/4") to DN 32 (1 1/4"), pressure class PN 25, water and water-glycol mixture, recommended for heating and cooling systems, 4-way ball valve specially suitable for technically correct filling, flushing and draining from domestic installations, ball 360° rotatable, additional device connection or pulse generator possible, brass body made from dezincification resistant special brass, nickel-plated, medium temperature display on handwheel, colour of handle red and blue.



HERZ BALL VALVE MODEL (2300, 2301); DN 8 (1/4") to DN 50 (2"), pressure class PN 1 bar, for technical gases and gas installations in compliance with DIN DVGW G260 and EN 331, operating temperature -20°C to +60°C, steel handles in lever or wing shape, connections on both sides with internal thread or on one side with external thread in accordance with ISO 7, bright brass body, standard colour of handles yellow. High-temperature resistant model, in the event of fire, the sealing locks the ball valve for a period of 30 minutes. Model with TAS (thermic armature safety) (2303, 2362); at ca. 100°C the ball valve is automatically closed by means of a thermic element and will sustain a temperature of 925°C for a period of 60 minutes.



MODEL VARIANT WITH INTEGRATED BACKFLOW PREVENTER (2110)

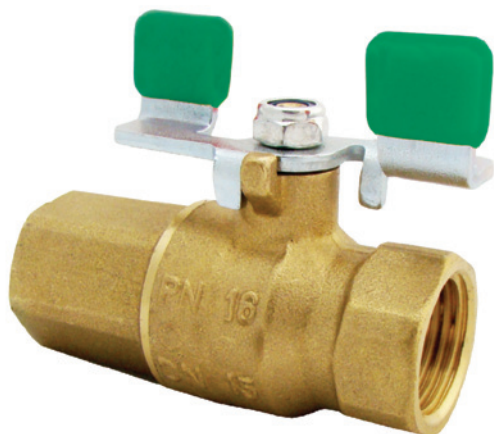

HERZ BALL VALVE MODEL (2300); DN 8 (1/4") to DN 50 (2"), pressure class PN 1 bar, for technical gases and gas installations in compliance with DIN DVGW G260, Austrian Specialist Association for Gas and Water (ÖVGW) and EN 331, operating temperature -20°C to +60°C, steel handles in lever or wing shape, connections on both sides with internal thread in accordance with ISO 7, brass body bright, standard colour of handles yellow.



HERZ BALL VALVE MODEL (2304, 2305); Models DN 10 (3/8") to DN 50 (2"), pressure class PN 4 bar, for technical gases and gas installations in compliance with DIN DVGW G260, operating temperature -20°C to +60°C, steel handles in lever or wing shape, connections on both sides with internal thread or on one side with external thread in accordance with ISO 7, brass body nickel-plated, standard colour of handles yellow.



HERZ Valves UK

Progress House, Moorfield Point
Moorfield Road, Slyfield Industrial Estate
Guildford, Surrey GU1 1RU
Telephone: 01483 502211 Fax: 01483 502025
E-Mail: sales@herzvalves.com
www.herzvalves.com

HERZ Armaturen GmbH

Richard-Strauss-Str. 22, A-1230 Vienna
Tel.: +43 (0)1 616 26 31-0, Fax: +43 (0)1 616 26 31-27
E-Mail: office@herz.eu

www.herz.eu

